



OMNIDIRECTIONAL A SERIES A19




SPECIFICATIONS

EQUIVALENT	25 to 60 Watt Incandescent
AVERAGE RATED LIFE	25,000 hrs
HOUSING	Plastic/Aluminum
BASE	Medium (E26)
POWER	120V 60Hz
LENS	Frosted
BEAM	320°
COLOR (K)	2700, 4000, 5000

BENEFITS

- ENERGY STAR Certified
- Up to 80% more efficient than incandescent equivalent
- Longer life and lower maintenance costs
- Dimmable when used with approved dimming switch
- Mercury and Lead free, as well as UV and IR free
- Instant on to full brightness

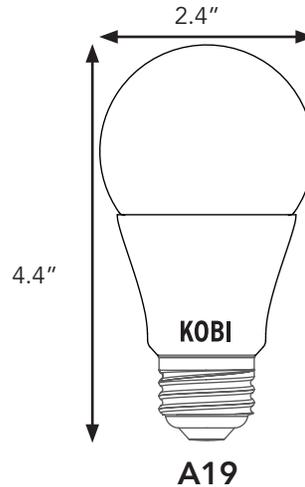

DIMMER COMPATIBILITY*

Lutron: MACL-153M, LGCL-153PLH, TAL06P-C1-K-L, TGCL-153PH, AYCL-153P, DVCL-153P, DVSCCL-153P, SCL-153P, MSCL-OP153M, CTCL-153P, TTCL-100, SELV-300P, DVELV-300P **Cooper:** ASPIRE-9573, DEVINE-DLC03P, SKYE-SLC03P, SAL06P, AAL06-C1-K-L, DAL06P-C1-K-L

*The listed dimmers have been tested and proven to work under limited laboratory conditions. All possible electrical conditions cannot be accurately simulated, and therefore some discrepancy may exist.

APPLICATION INFORMATION

Applications	Market Segments
— Lamps and Luminaires	— Residential
— Ceiling Fans	— Hospitality
— Pendant	— Office
	— Retail

Application Notes

1. Operating temperature range between -20°C and +45°C (-4°F and +113°F)
2. Not for use with emergency light fixtures or exit lights
3. Not for use in totally enclosed fixture
4. Suitable for indoor/damp locations and sheltered outdoor use

This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

CERTIFICATIONS



LM79 reports are available upon request.



Based on 12 hours of use per day.

OMNIDIRECTIONAL A SERIES

ORDERING INFORMATION

A19

Order Code	Part Number	Wattage (W)	Base	Replaces	Voltage (V)	CCT ¹	Typical Lumens ²	CRI ³	Dim	Beam	Weight (lbs)	Case Quantity
K0M0	LED-250-AO-27	4	E26	25W A19	120	2700	250	80	Yes	320°	0.3	40
K0M6	LED-250-AO-40	4	E26	25W A19	120	4000	250	83	Yes	320°	0.3	40
K0M1	LED-250-AO-50	4	E26	25W A19	120	5000	250	83	Yes	320°	0.3	40
K0M2	LED-470-AO-27	7	E26	45W A19	120	2700	470	81	Yes	320°	0.3	40
K0M7	LED-470-AO-40	7	E26	45W A19	120	4000	470	82	Yes	320°	0.3	40
K0M3	LED-470-AO-50	7	E26	45W A19	120	5000	470	82	Yes	320°	0.3	40
K0M4	LED-800-AO-27	10	E26	60W A19	120	2700	800	81	Yes	320°	0.3	40
K0M8	LED-800-AO-40	10	E26	60W A19	120	4000	800	82	Yes	320°	0.3	40
K0M5	LED-800-AO-50	10	E26	60W A19	120	5000	800	83	Yes	320°	0.3	40

1. Thermally stable typical CCT (±10%) 2. Thermally stable typical lumens (±10%) 3. CRI - Color Rendering Index

For the most up-to-date specifications, visit kobielectric.com.